



## Specification Sheet

### VMax® P550® Turf Reinforcement Mat

#### DESCRIPTION

The composite turf reinforcement mat (C-TRM) shall be a machine-produced mat of 100% UV stable polypropylene fiber matrix incorporated into permanent three-dimensional turf reinforcement matting. The matrix shall be evenly distributed across the entire width of the matting and stitch bonded between an ultra heavy duty UV stabilized nettings with 0.50 x 0.50 inch (1.27 x 1.27 cm) openings, an ultra heavy UV stabilized, dramatically corrugated (crimped) intermediate netting with 0.5 x 0.5 inch (1.27 x 1.27 cm) openings, and covered by an ultra heavy duty UV stabilized nettings with 0.50 x 0.50 inch (1.27 x 1.27 cm) openings. The middle corrugated netting shall form prominent closely spaced ridges across the entire width of the mat. The three nettings shall be stitched together on 1.50 inch (3.81cm) centers with UV stabilized polypropylene thread to form permanent three-dimensional turf reinforcement matting. All mats shall be manufactured with a colored thread stitched along both outer edges as an overlap guide for adjacent mats.


The P550 shall meet Type 5A, 5B, and 5C specification requirements established by the Erosion Control Technology Council (ECTC) and Federal Highway Administration's (FHWA) FP-03 Section 713.18

#### Material Content

<b>Matrix</b>	100% UV stable polypropylene fiber	0.5 lb/sy (0.27 kg/sm)
<b>Netting</b>	Top and Bottom, UV-Stabilized Polypropylene	24 lb/1000 sf (11.7 kg/100 sm)
	Middle, Corrugated UV-Stabilized Polypropylene	24 lb/1000 sf (11.7 kg/100 sm)
<b>Thread</b>	Polypropylene, UV Stable	

#### Standard Roll Sizes

<b>Width</b>	6.5 ft (2.0 m)	8 ft (2.44m)
<b>Length</b>	55.5 ft (16.9 m)	68 ft (20.7 m)
<b>Weight ± 10%</b>	52 lbs (23.59 kg)	78 lbs (35.4 kg)
<b>Area</b>	40 sy (33.4 sm)	60 sq. yd. (50.2 sm)

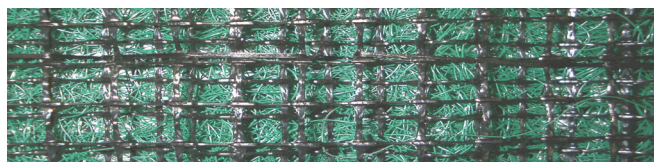

Index Property	Test Method	Typical
<b>Thickness</b>	ASTM D6525	0.72 in. (18.29 mm)
<b>Resiliency</b>	ASTM 6524	95%
<b>Density</b>	ASTM D792	0.892 g/cm <sup>3</sup>
<b>Mass/Unit Area</b>	ASTM 6566	21.25 oz/sy (723 g/sm)
<b>UV Stability</b>	ASTM D4355/ 1000 HR	100%
<b>Porosity</b>	ECTC Guidelines	96%
<b>Stiffness</b>	ASTM D1388	366.3 oz-in.
<b>Light Penetration</b>	ASTM D6567	16.5%
<b>Tensile Strength - MD</b>	ASTM D6818	1421 lbs/ft (21.07 kN/m)
<b>Elongation - MD</b>	ASTM D6818	40.5%
<b>Tensile Strength - TD</b>	ASTM D6818	1191.6 lbs/ft (17.67 kN/m)
<b>Elongation - TD</b>	ASTM D6818	28.8%
<b>Biomass Improvement</b>	ASTM D7322	378%

#### Design Permissible Shear Stress

	Short Duration	Long Duration
<b>Phase 1: Unvegetated</b>	4.0 psf (191 Pa)	3.25 psf (156 Pa)
<b>Phase 2: Partially Veg.</b>	12.0 psf (576 Pa)	12.0 psf (576 Pa)
<b>Phase 3: Fully Veg.</b>	14.0 psf (672 Pa)	12.0 psf (576 Pa)
<b>Unvegetated Velocity</b>	12.5 fps (3.8 m/s)	
<b>Vegetated Velocity</b>	25 fps (7.6 m/s)	

#### NTPEP ASTM D6460 Large Scale Channel

<b>Vegetated Shear Stress</b>	>13.2 psf (632 Pa)
<b>Vegetated Velocity</b>	>24.5 fps (7.47 m/s)

### Slope Design Data: C Factors

Slope Length (L)	Slope Gradients (S)		
	≤ 3:1	3:1 – 2:1	≥ 2:1
≤ 20 ft (6 m)	0.0005	0.015	0.043
20-50 ft	0.0173	0.031	0.050
≥ 50 ft (15.2 m)	0.035	0.047	0.057

### Roughness Coefficients – Unveg.

Flow Depth	Manning's n
≤ 0.50 ft (0.15 m)	0.041
0.50 – 2.0 ft	0.040-0.013
≥ 2.0 ft (0.60 m)	0.013



Western Green  
 4609 E. Boonville-New Harmony Rd.  
 Evansville, IN 47725

nagreen.com  
 800-772-2040

©2019, North American Green is a registered trademark from Western Green. Certain products and/or applications described or illustrated herein are protected under one or more U.S. patents. Other U.S. patents are pending, and certain foreign patents and patent applications may also exist. Trademark rights also apply as indicated herein. Final determination of the suitability of any information or material for the use contemplated, and its manner of use, is the sole responsibility of the user. Printed in the U.S.A.