

MATERIAL PROPERTY DATA SHEET




ShoreMax[®]

Permanent • Flexible • Transition Mat

DESCRIPTION

The Western Green ShoreMax Transition Mat shall be a resilient rubber mat with surface texture and multi-nib backing. It shall have a large hole drainage system with aperture openings approximately 1.25 in (3.2 cm) in diameter. ShoreMax mat is a transition mat used as bio-technical replacement for hard armor. ShoreMax mat is mechanically anchored and is a flexible matting that can be installed in transitional areas susceptible to soil scour. ShoreMax mat can provide erosion control in highly erosive areas, including shorelines, and can be used in conjunction with rolled erosion control products.

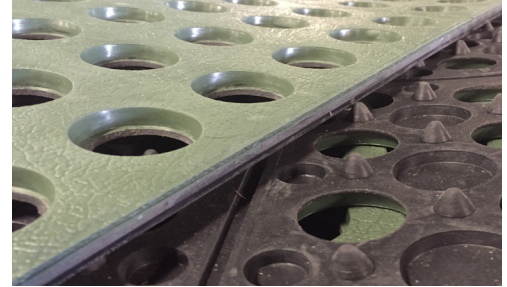

Material Content		
Matting	100% UV-stabilized natural rubber	2.00 lb/ft ² (10 kg/m ²)

Color Dark Green

Standard Roll Sizes		
Width ³	3 ft	(1.0 m)
Length	5 ft	(1.5 m)
Weight ± 10%	30 lb	(13.6 kg)
Area	1.67 SY	(1.39 m ²)

Approvals & Classification	
Classification	N/A
TTI Approvals	N/A
NTPEP Number	N/A

Disclaimer: The information contained herein may represent product index data, performance ratings, bench scale testing or other material utility quantifications. Each representation may have unique utility and limitations. Every effort has been made to ensure accuracy, however, no warranty is claimed and no liability shall be assumed by Western Green or its affiliates regarding the completeness, accuracy or fitness of these values for any particular application or interpretation. While testing methods are provided for reference, values shown may be derived from interpolation or adjustment to be representative of intended use. For further information, please feel free to contact Western Green.

©2022, Western Green is a registered trademark from Western Green. Certain products and/or applications described or illustrated herein are protected under one or more U.S. patents. Other U.S. patents are pending, and certain foreign patents and patent applications may also exist. Trademark rights also apply as indicated herein. Final determination of the suitability of any information or material for the use contemplated, and its manner of use, is the sole responsibility of the user. Printed in the U.S.A.

Index Property	Test Method	Typical	
Thickness	ASTM D6525	0.75 in.	(19 mm)
Mass/Unit Area	ASTM D6566	2.00 lbs/sy	(10 kg/sm)
Tensile Strength – MD	ASTM D6818	606 lbs/ft	(9.0 kN/m)
Tensile Strength – TD	ASTM D6818	625 lbs/ft	(9.25 kN/m)
Elongation - MD	ASTM D6818	100%	
Elongation – TD	ASTM D6818	125%	
UV Stability	ASTM D4355	90% @1000 hr	
Light Penetration	ASTM D6567	20%	
Biomass Improvement	ASTM D7322	240%	
Specific Gravity/Density	ASTM D792	1.63 oz/in ³	(1.5 g/cm ³)
Flexural Rigidity	ASTM D6575	1.97 in-lb	

Design Parameters			
TRM Underlayment		Unvegetated	Vegetated ³
SC250	Permissible Shear	7.5 psf	10.0 psf
	Velocity	18 fps	18 fps
C350	Permissible Shear	8.0 psf	12.0 psf
	Velocity	19 fps	20 fps
P550	Permissible Shear	8.5 psf	14.0 psf
	Velocity	19.5 fps	25 fps

NTPEP ASTM D6460 Large Scale Channel*	
Unvegetated Shear Stress	8.6 psf (412 Pa)
Vegetated Shear Stress	> 12.5 psf (599 Pa)
Unvegetated Velocity	19.5 fps (5.95 m/s)
Vegetated Velocity	> 26.0 fps (7.93 m/s)

* Testing conducted with ShoreMax installed over North American Green P550 Turf Reinforcement Mat

Rev. 4.2023

Scan for additional and updated product information, or [click here](#).

