




**ROLLMAX™**  
ROLLED EROSION CONTROL

## Specification Sheet EroNet™ DS75™ Erosion Control Blanket

### DESCRIPTION

The ultra short-term single net erosion control blanket shall be a machine-produced mat of 100% agricultural straw with a functional longevity of up to 45 days. (NOTE: functional longevity may vary depending upon climatic conditions, soil, geographical location, and elevation). The blanket shall be of consistent thickness with the straw evenly distributed over the entire area of the mat. The blanket shall be covered on the top side with a polypropylene netting having an approximate 0.50 x 0.50 (1.27 x 1.27 cm) mesh with photodegradable accelerators to provide breakdown of the netting within approximately 45 days, depending upon geographical location and elevation. The blanket shall be sewn together on 1.50 inch (3.81 cm) centers with degradable thread. The blanket shall be manufactured with a colored thread stitched along both outer edges (approximately 2-5 inches [5-12.5 cm] from the edge) as an overlap guide for adjacent mats.

The DS75 shall meet Type 1.C specification requirements established by the Erosion Control Technology Council (ECTC) and Federal Highway Administration's (FHWA) FP-03 Section 713.17

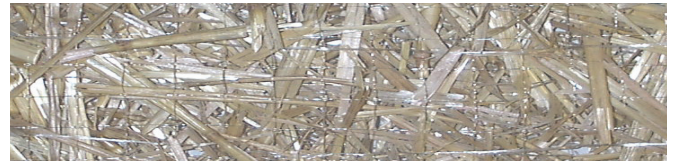

Index Property	Test Method	Typical
Thickness	ASTM D6525	0.45 in. (11.43 mm)
Resiliency	ECTC Guidelines	78.8%
Water Absorbency	ASTM D1117	375%
Mass/Unit Area	ASTM 6475	8.57 oz/sy (291 g/sm)
Swell	ECTC Guidelines	15%
Smolder Resistance	ECTC Guidelines	Yes
Stiffness	ASTM D1388	6.31 oz-in
Light Penetration	ASTM D6567	10%
Tensile Strength - MD	ASTM D6818	105.6 lbs/ft (1.57 kN/m)
Elongation - MD	ASTM D6818	34%
Tensile Strength - TD	ASTM D6818	42.0 lbs/ft (0.62 kN/m)
Elongation - TD	ASTM D6818	25.2%
Biomass Improvement	ASTM D7322	286%

Material Content		
Matrix	100% Straw Fiber	0.5 lbs/sq yd (0.27 kg/sm)
Netting	Top side only, lightweight photodegradable with photo accelerators	1.5 lb/1000 sq ft (0.73 g/sm)
Thread	Degradable	

Standard Roll Sizes			
Width	6.67 (2.03 m)	8.0 ft (2.4 m)	16 ft (4.87 m)
Length	108 ft (32.92 m)	112 ft (34.14 m)	112 ft (34.14 m)
Weight ± 10%	40 lbs (18.14 kg)	50 lbs (22.68 kg)	100 lbs (45.36 kg)
Area	80 sq yd (66.9 sm)	100 sq yd (83.61 sm)	200 sq yd (167.22 sm)

Design Permissible Shear Stress	
Unvegetated Shear Stress	1.55 psf (74 Pa)
Unvegetated Velocity	5.00 fps (1.52 m/s)

Slope Design Data: C Factors			
Slope Gradients (S)			
Slope Length (L)	≤ 3:1	3:1 – 2:1	≥ 2:1
≤ 20 ft (6 m)	0.029	N/A	N/A
20-50 ft	0.11	N/A	N/A
≥ 50 ft (15.2 m)	0.19	N/A	N/A

Roughness Coefficients – Unveg.	
Flow Depth	Manning's n
≤ 0.50 ft (0.15 m)	0.055
0.50 – 2.0 ft	0.055-0.021
≥ 2.0 ft (0.60 m)	0.021



Western Green  
4609 E. Boonville-New Harmony Rd.  
Evansville, IN 47725

nagreen.com  
800-772-2040

©2019, North American Green is a registered trademark from Western Green. Certain products and/or applications described or illustrated herein are protected under one or more U.S. patents. Other U.S. patents are pending, and certain foreign patents and patent applications may also exist. Trademark rights also apply as indicated herein. Final determination of the suitability of any information or material for the use contemplated, and its manner of use, is the sole responsibility of the user. Printed in the U.S.A.